



SafePace® 400 Your Speed Sign

The Traffic Logix® SafePace® 400 radar sign is a 2 or 3 digit speed sign with full size 15” digits.

The Traffic Logix® SafePace® 400 radar sign displays driver speeds in full size 15” digits. Available with a choice of 2 or 3-digit display, the SafePace 400 offers the flexibility of use even on streets where drivers may exceed 99 km/h. With advanced technology and a full range of features and options, the SafePace 400 will help you alert and slow drivers down, reducing accidents, and improving safety on your streets.



*Choice of faceplate colors available
Compact and Standard Faceplate Sizes Available*

400 Specifications

Digit Size	15”
Height	42.5”
Weight	53 lbs (AC Powered)
24/7, 365 Scheduling	✓
Data Collection	✓
Solar Compatibility	✓
Battery Operated	✓
Universal Mounting	x
Cloud Compatibility	✓
Trailer Compatibility	✓
Dolly Compatibility	x
Hitch Compatibility	x
Warranty	2 Years

Features

MUTCD compliant radar speed sign with static “Your Speed” text and 15” digits.

New sign face allows for choice of **2 or 3 digit speed display** for roads with higher speed limits.


Unique light enhancing, anti glare lens system provides **brilliant visibility** even in poor lighting.

Includes **integrated flashing speed violator strobe** to alert speeding drivers.

Ultra-low power consumption including the most power-efficient radar technology and optional solar power.

High strength aluminum sign face and individual optical lenses **protect against vandalism or theft.**

Stealth mode allows the sign to collect baseline traffic data while speed display appears blank to motorists.

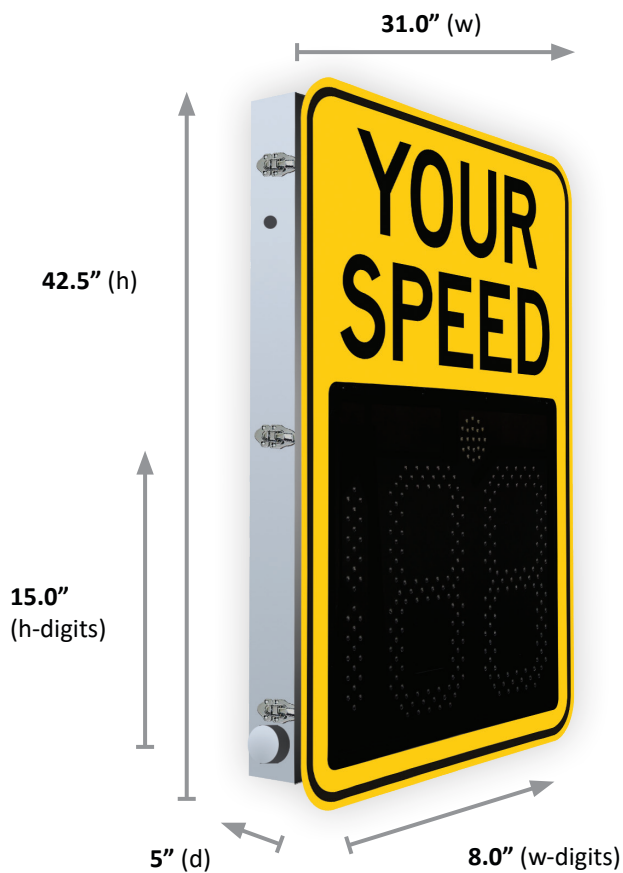

Feature	Specifications
Dimensions	
Digits	15.0"(h) x 8.0"(w), 112 LEDs per digit
Unit with "YOUR SPEED" sign mounted	Full size: 42.5"(h) x 31.0"(w) x 5.0"(d)
Sign Weight (includes "YOUR SPEED" sign (2 lbs) mounted)	
AC Powered	53 lbs
4 cell battery powered model	57 lbs
Solar powered model	57 lbs
General Specifications	
Operating Temperatures F (C):	-40° (-40°) to 185° (85°)
Speed Units	Miles Per Hour (mph) or Kilometers Per Hour (km/h)
Faceplate	Yellow or white high-Intensity prismatic reflective sheeting on the sign face with black colored text MUTCD approved colors and format

Feature	Specifications
Bashplate	Aluminum, 0.1875"
Communications	Bluetooth (standard) GSM/GPRS (optional, for use with SafePace Cloud)
Programming	SafePace Pro sign management software - SafePace Cloud remote sign management 24/7 365 day unlimited programming and scheduling
Power Options (Electrical Specifications)	
AC power input	100~240 V AC
DC power input	12 V DC
Solar panel options	90W
Radar	
Internal	Doppler (FCC approved)
Radar RF out	5 mW maximum
Radar f-center	24.125 GHz +/- 25 MHz
Pickup distance	Up to 1,200 feet
Beam	11° x 11°, Linear polarization
CE Mark	Yes
Display	
LEDs	277
Digits	256 Amber, 23°, 5 mm, luminous Intensity (5,000 – 12,000 mcd/LED)
Speed Violator Strobe	21 White, 15°, 5 mm, luminous intensity (18,000 – 28,000 mcd/LED)
Optical Lenses	277
Ambient Light Sensors	1 sensor and automatic brightness adjustment
Enclosure	
Construction	12 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant Non-sealed and ventilated
Warranty	
Sign	2 years
Batteries	1 year